


Sanding disc with foam material, self-fastening,
waterproof

FD 500

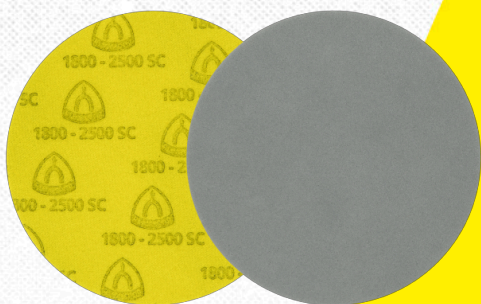

Properties

Bonding agent	Resin
Grain	Aluminium oxide/SiC
Backing	Foam material/velours

Product benefit

Uniform pressure distribution thanks to elastic foam coating - Soft grinding and extremely fine scratch pattern - Superior flexibility and adaptability on contours and profiles - Exceptionally well suited for finish grinding - Suitable for wet and dry use - Available in grit 1000, 1500 (Aluminium oxide) and 2000, 3000 (SiC)

Application

Paint/Varnish/Filler ●

Applications

- Automotive industry
- Boat and shipbuilding
- Wind energy industry
- Paint shops
- Wood processing industry

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
125	1000	○ 0	FD 500	10	342291
125	1500	○ 0	FD 500	10	342290
125	2000	○ 0	FD 500	10	342289
125	3000	○ 0	FD 500	10	342288
150	1000	○ 0	FD 500	10	342294
150	1500	○ 0	FD 500	10	342293

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de



Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
150	2000	○ 0	FD 500	10	342295
150	3000	○ 0	FD 500	10	342292

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

